

7

C-ONE SUPERPLUS

**Automatic Cut & Seal Device
To Eliminate The "Film Tail"
"Don't Get Off" System**



Technical Data

Height	2473 mm
Width	1650 mm
Length	2804 mm
Turntable height	80 mm
Weight	600 kg
Power supply	230 VAC
Power absorption	2 kW

C-One Superplus


In C-One Division there is a synergy of design ability and extensive experience around wrapping machines business.

C-One Superplus is a fully automatic low profile turntable machine, with four original solutions: automatic film clamping system; automatic film cutting; film sealing system; "tail" elimination device.

Along with an infrared/radio remote control, these four systems allow the operator to be free from all manual work, increasing safety, improving packaging quality and saving time.

Automatic, practical, robust, simple: C-One Superplus is the right solution even for the most demanding customers.

7 C-ONE SUPERPLUS *Semi-Automatic*

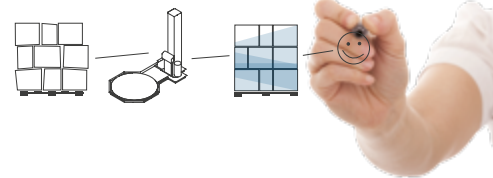

Product Specifications

- > Automatic cycle for film hooking, pallet wrapping, film cold cutting and film hot sealing
- > Air device to blow up the film tail
- > Power pre-stretch carriage
- > Electronic printed circuit board for the management of the cycle
- > Frequency controller for carriage speed adjustment
- > Frequency controller for turntable speed adjustment
- > Loading plate ø 1650 mm
- > Maximum height of pallet: 2200 mm
- > Maximum size of the pallet: 800x1200 mm
- > Maximum loading weight: 2000 kg
- > Photocell for pallet height detection
- > Safety stop at the base of the carriage
- > Stop at 0 position
- > Power board IP54
- > 3 password levels (including lock password)
- > Adjustable parameters by the control panel without password: cycle selection, bottom laps, top laps, topsheet cycle parameters, rotation speed, carriage ascent speed, carriage descent speed, film tension, starting wrapping height
- > Quick selection of 6 main parameters or saved programs
- > USB port to upload software and download settings and reports
- > Statistics
- > 3 working cycles: ascent/descent; topsheet; layers
- > Storage of 32 end user programs
- > 3 working ways: semimanual, semiautomatic, fixed height
- > Strengthening operation
- > Acoustic warning at the cycle beginning and stop
- > Autodiagnostic
- > Wrapped pallet counter
- > Powder coating
- > Braked turntable at the end of the cycle



Sealing Unit



Control Panel

Main Options

- | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> Top-press Adjustable power pre-stretch 3000 mm max wrapping height 1800 mm turntable 2000 kg max pallet weight Remote control Ramp Pit frame | <ul style="list-style-type: none"> Photocell for dark loads Weighing system Mechanical system to brake roll containers Feet under the machine Safety fences |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



Pps Carriage With Roping System